


Features of Spring Clamp Ground Terminal Blocks



DST 1.5-PE-D



Features of Spring Clamp Ground Terminal Blocks


- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy of handling and safe connection.
- Low contact resistance.
- Easy mounting and dismounting from the terminal rail.

彈片接地型接線座之特性

- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易


Specifications (產品規格)	1.5mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	AWG 28-14	
CSA	AWG 28-14	
IEC	0.08-1.5mm <sup>2</sup>	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	4.2 x 48.8 x 36.5	
For TS35x7.5	4.2 x 48.8 x 44	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-ST2.5-DP	50
Comb Link (邊接式聯接件)	DFBS2-4	50
	DFBS3-4	50
	DFBS4-4	50
	DFBS5-4	50
	DFBS10-4	10
Marking Tags (標記號)	DUC-TMF4	10
	DUC-TM4	10
Tool (工具)	DS2	

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

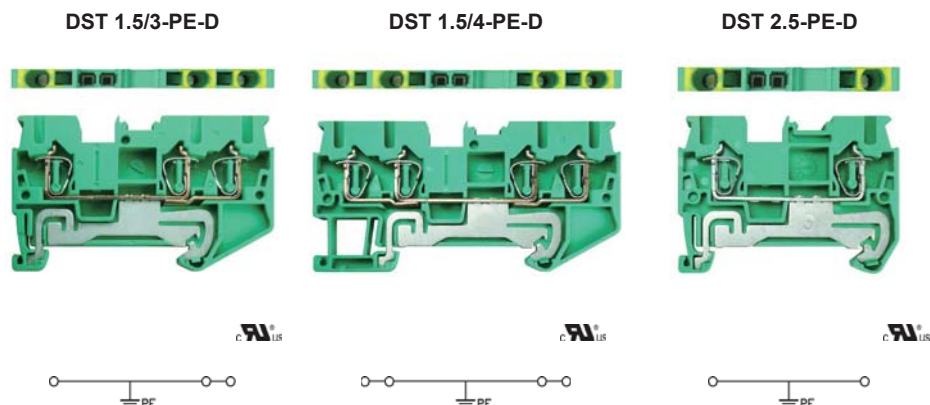


Specifications (產品規格)	1.5mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	AWG 28-14	AWG 28-14	AWG 28-12
<b>CSA</b>	AWG 28-14	AWG 28-14	AWG 28-12
<b>IEC</b>	0.08-1.5mm <sup>2</sup>	0.08-1.5mm <sup>2</sup>	0.08-2.5mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	6KV / 3	6KV / 3	8KV / 3
<b>Insulation stripping length (mm) (撥線長度)</b>	10mm	10mm	10mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x7.5	4.2 x 60.7 x 36.5	4.2 x 72.6 x 36.5	5.2 x 48.8 x 36.5
For TS35x7.5	4.2 x 60.7 x 44	4.2 x 72.6 x 44	5.2 x 48.8 x 44
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-ST2.5/3-DP    50	DD-ST2.5/4-DP    50	DD-ST2.5-DP    50
<b>Comb Link (連接式聯接件)</b>	DFBS2-4    50	DFBS2-4    50	DFBS2-5    50
	DFBS3-4    50	DFBS3-4    50	DFBS3-5    50
	DFBS4-4    50	DFBS4-4    50	DFBS4-5    50
	DFBS5-4    50	DFBS5-4    50	DFBS5-5    50
	DFBS10-4    10	DFBS10-4    10	DFBS10-5    10
<b>Marking Tags (標記號)</b>	DUC-TMF4    10	DUC-TMF4    10	DUC-TMF5    10
	DUC-TM4    10	DUC-TM4    10	DUC-TM5    10
<b>Tool (工具)</b>	DS2	DS2	DS3

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

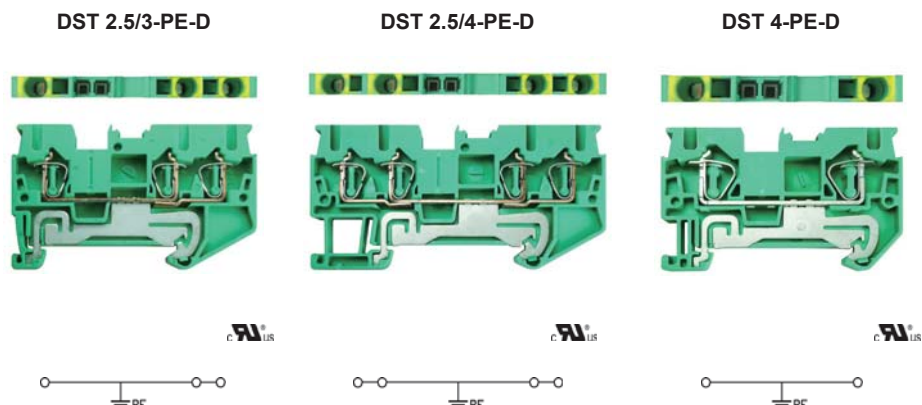


Specifications (產品規格)	2.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	AWG 28-12	AWG 28-12	AWG 28-10
CSA	AWG 28-12	AWG 28-12	AWG 28-10
IEC	0.08-2.5mm <sup>2</sup>	0.08-2.5mm <sup>2</sup>	0.08-4mm <sup>2</sup>
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5
For TS35x7.5	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST2.5/3-DP 50	DD-ST2.5/4-DP 50	DD-ST4-DP 50
Comb Link (連接式聯接件)	DFBS2-5 50 DFBS3-5 50 DFBS4-5 50 DFBS5-5 50 DFBS10-5 10	DFBS2-5 50 DFBS3-5 50 DFBS4-5 50 DFBS5-5 50 DFBS10-5 10	DFBS2-6 50 DFBS3-6 50 DFBS4-6 50 DFBS5-6 50 DFBS10-6 10
Marking Tags (標記號)	DUC-TMF5 10 DUC-TM5 10	DUC-TMF5 10 DUC-TM5 10	DUC-TMF6 10 DUC-TM6 10
Tool (工具)	DS3	DS3	DS3

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

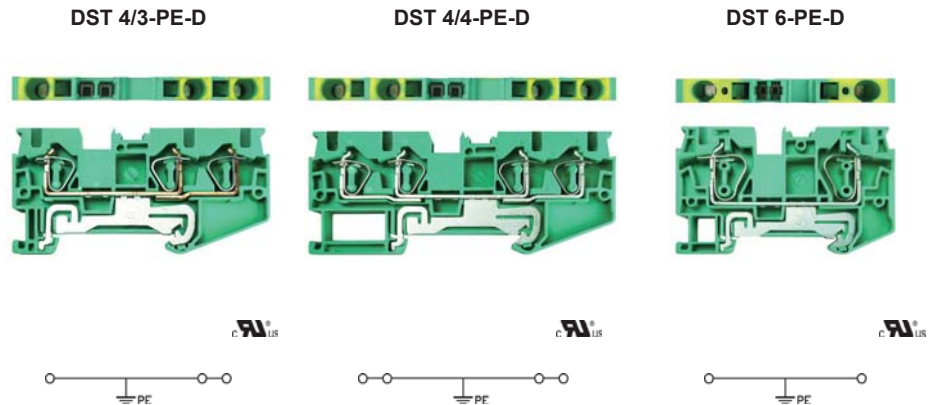


Specifications (產品規格)	4mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
<b>UL</b>	AWG 28-10	AWG 28-10	AWG 24-8
<b>CSA</b>	AWG 28-10	AWG 28-10	AWG 24-8
<b>IEC</b>	0.08-4mm <sup>2</sup>	0.08-4mm <sup>2</sup>	0.2-6mm <sup>2</sup>
<b>Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)</b>	8KV / 3	8KV / 3	8KV / 3
<b>Insulation stripping length (mm) (撥線長度)</b>	10mm	10mm	12mm
<b>Material / Available Color (材質顏色)</b>			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x7.5	6.2 x 71.7 x 36.5	6.2 x 87.3 x 36.5	8.2 x 69.5 x 43.5
For TS35x7.5	6.2 x 71.7 x 44	6.2 x 87.3 x 44	8.2 x 69.5 x 51
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
<b>End Bracket (終端擋板)</b>	SEW35    50	SEW35    50	SEW35    50
<b>End Plate (擋板)</b>	DD-ST4/3-DP    50	DD-ST4/4-DP    50	DD-ST6-DP    50
<b>Comb Link (連接式聯接件)</b>	DFBS2-6    50	DFBS2-6    50	DFBS2-8    50
	DFBS3-6    50	DFBS3-6    50	DFBS3-8    50
	DFBS4-6    50	DFBS4-6    50	DFBS4-8    50
	DFBS5-6    50	DFBS5-6    50	DFBS5-8    50
	DFBS10-6    10	DFBS10-6    10	DFBS10-8    10
<b>Marking Tags (標記號)</b>	DUC-TMF6    10	DUC-TMF6    10	DUC-TMF8    10
	DUC-TM6    10	DUC-TM6    10	DUC-TM8    10
<b>Tool (工具)</b>	DS3	DS3	DS4

Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

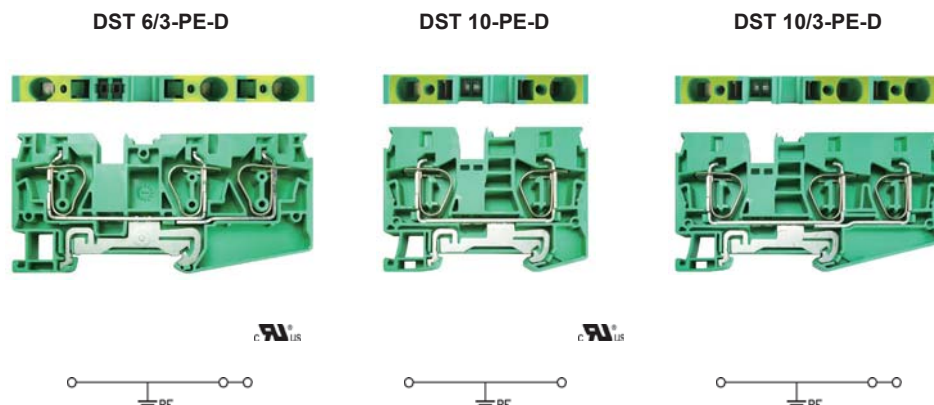

Specifications (產品規格)	6mm <sup>2</sup>	10mm <sup>2</sup>	10mm <sup>2</sup>
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	AWG 24-8	AWG 24-6	AWG 24-6
CSA	AWG 24-8	AWG 24-6	AWG 24-6
IEC	0.2-6mm <sup>2</sup>	0.2-10mm <sup>2</sup>	0.2-10mm <sup>2</sup>
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	12mm	18mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	8.2 x 90.5 x 43.5	10.2 x 71.3 x 50.5	10.2 x 97 x 50.5
For TS35x7.5	8.2 x 90.5 x 51	10.2 x 71.3 x 58	10.2 x 97 x 58
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-ST6/3-DP 50	DD-ST10-DP 50	DD-ST10/3-DP 50
Comb Link (連接式聯接件)	DFBS2-8 50 DFBS3-8 50 DFBS4-8 50 DFBS5-8 50 DFBS10-8 10	DFBS2-10 10 DFBS5-10 10	DFBS2-10 10 DFBS5-10 10
Marking Tags (標記號)	DUC-TMF8 10 DUC-TM8 10	DUC-TMF10 10 DUC-TM10 10	DUC-TMF10 10 DUC-TM10 10
Tool (工具)	DS3	DS5	DS5


## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

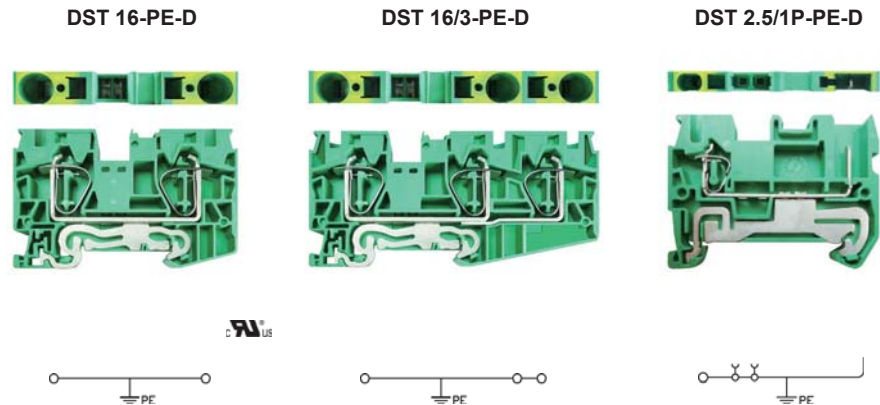

Specifications (產品規格)	16mm <sup>2</sup>	16mm <sup>2</sup>	2.5mm <sup>2</sup>
<b>Technical Data (技術參數)</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>	<b>Rated voltage / Rated current / Wire Size</b>
UL	AWG 24-4	AWG 24-4	AWG 28-12
CSA	AWG 24-4	AWG 24-4	AWG 28-12
IEC	0.2-16mm <sup>2</sup>	0.2-16mm <sup>2</sup>	0.08-4mm <sup>2</sup>
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 污染等級)	8KV / 3	8KV / 3	6KV / 3
Insulation stripping length (mm) (撥線長度)	18mm	18mm	10mm
Material / Available Color (材質顏色)			
<b>Rail Dimensions (導軌尺寸)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>	<b>T / W / H (mm)</b>
For TS35x7.5	12.2 x 80.6 x 51.5	12.2 x 107.8 x 51.5	5.2 x 48.8 x 36.5
For TS35x7.5	12.2 x 80.6 x 59	12.2 x 107.8 x 59	5.2 x 48.8 x 44
<b>Accessories (附件)</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>	<b>Cat. No.</b> <b>Qty.</b>
End Bracket (終端擋板)	SEW35    50	SEW35    50	SEW35    50
End Plate (擋板)	DD-ST16-DP    50	DD-ST16/3-DP    50	DD-ST2.5-DP    50
Comb Link (邊接式聯接件)	DFBS2-12    10	DFBS2-12    10	DFBS2-5    50 DFBS3-5    50 DFBS4-5    50 DFBS5-5    50 DFBS10-5    10
Marking Tags (標記號)	DUC-TMF12    10 DUC-TM12    10	DUC-TMF12    10 DUC-TM12    10	DUC-TMF5    10 DUC-TM5    10
Tool (工具)	DS5	DS5	DS3

## Features of Spring Clamp Ground Terminal Blocks 彈片接地型接線座

### DSTTB 2.5-PE-D



Specifications (產品規格)	2.5mm <sup>2</sup>	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	AWG 28-12	
CSA	AWG 28-12	
IEC	0.08-2.5mm <sup>2</sup>	
Insulating impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	5.2 x 67.8 x 47.4	
For TS35x7.5	5.2 x 67.8 x 54.9	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-STTB2.5-DP	50
Comb Link (邊接式聯接件)	DFBS2-5	50
	DFBS3-5	50
	DFBS4-5	50
	DFBS5-5	50
	DFBS10-5	10
Marking Tags (標記號)	DUC-TMF5	10
	DUC-TM5	10
Tool (工具)	DS3	