


Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

PUSH IN GROUNDING SERIES

Features of Spring Clamp Ground Terminal Blocks

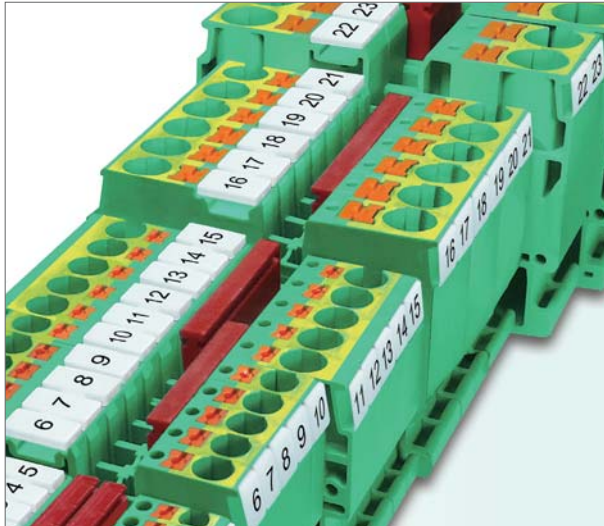


Features of Spring Clamp Ground Terminal Blocks

- Vibration proof grounding
- Space-saving design / Front connection.
- Easy to operate, fast wiring installation with top wire entry.
- Corrosion-proof terminal points.
- Easy for the extension of terminal connection.
- Easy of handling and safe connection.
- Low contact resistance.
- Easy mounting and dismantling from the terminal rail.
- Connecting without tools, easy and time-saving.
- Colored platens ensure safety connections and operations.

彈片接地型接線座之特性


- 具有抗震及接地之效果
- 節省空間之設計 / 前緣導線連接方式
- 操作簡便且快速的導線安裝方式 (頂部進線)
- 抗腐蝕性佳 (使用良好的金屬材料)
- 容易擴充及延伸性佳
- 操作簡便且連接處安全性高
- 低接觸電阻
- 接線座從軌道上安裝及拆卸容易
- 連接導線無需工具即可，輕鬆、節省時間
- 帶顏色的退線按鈕，確保安全接線和操作

DPT 1.5-PE




Specifications (產品規格)	1.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	
UL	AWG 26-14	
CSA	AWG 26-14	
IEC	0.14-1.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm	
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	
For TS35x7.5	3.5 x 45 x 32	
For TS35x7.5	3.5 x 45 x 39.5	
Accessories (附件)	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50
End Plate (擋板)	DD-PT1.5P	50
Comb Link (連接式聯接件)		
Marking Tags (標記號)	DUC-TMF3.5	10
	DUC-TM3.5	10
Tool (工具)	DS2	

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

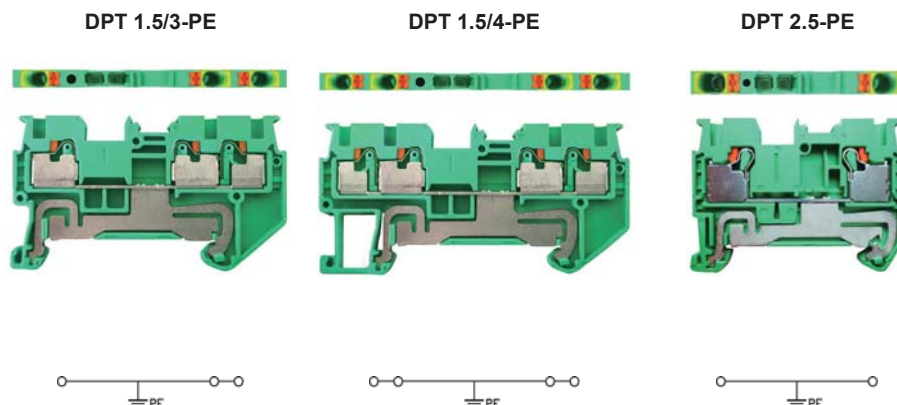


Specifications (產品規格)	1.5mm ²		1.5mm ²		2.5mm ²	
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size		Rated voltage / Rated current / Wire Size	
UL	AWG 26-14		AWG 26-14		AWG 26-12	
CSA	AWG 26-14		AWG 26-14		AWG 26-12	
IEC	0.14-1.5mm ²		0.14-1.5mm ²		0.14-2.5mm ²	
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	6KV / 3		6KV / 3		8KV / 3	
Insulation stripping length (mm) (撥線長度)	10mm		10mm		10mm	
Material / Available Color (材質顏色)						
Rail Dimensions (導軌尺寸)	T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
For TS35x7.5	3.5 x 54.1 x 32		3.5 x 63.2 x 32		5.2 x 48.5 x 36.5	
For TS35x7.5	3.5 x 54.1 x 39.5		3.5 x 63.2 x 39.5		5.2 x 48.5 x 44	
Accessories (附件)	Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
End Bracket (終端擋板)	SEW35	50	SEW35	50	SEW35	50
End Plate (擋板)	DD-PT1.5/3P	50	DD-PT1.5/4P	50	DD-ST2.5P	50
Comb Link (連接式聯接件)						
Marking Tags (標記號)	DUC-TMF3.5	10	DUC-TMF3.5	10	DUC-TMF5	10
	DUC-TM3.5	10	DUC-TM3.5	10	DUC-TM5	10
Tool (工具)	DS2		DS2		DS3	

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

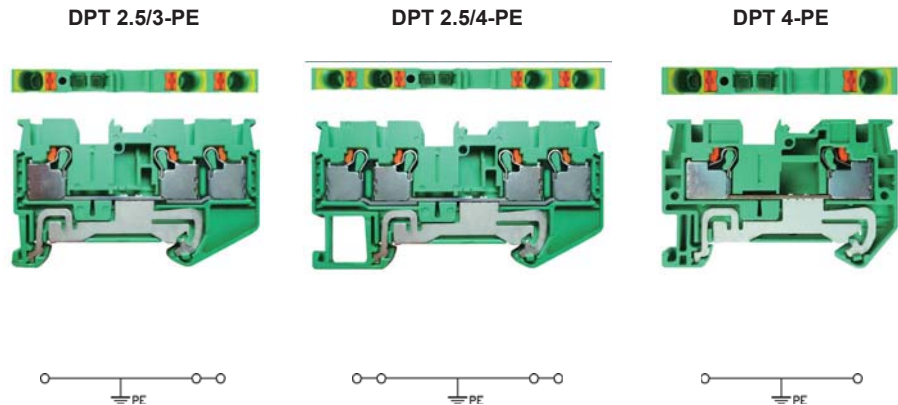


Specifications (產品規格)	2.5mm ²	2.5mm ²	4mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	AWG 26-12	AWG 26-12	AWG 24-10
CSA	AWG 26-12	AWG 26-12	AWG 24-10
IEC	0.14-4mm ²	0.14-4mm ²	0.2-4mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	10mm	10mm	10mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	5.2 x 60.7 x 36.5	5.2 x 72.4 x 36.5	6.2 x 56.1 x 36.5
For TS35x7.5	5.2 x 60.7 x 44	5.2 x 72.4 x 44	6.2 x 56.1 x 44
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT2.5/3P 50	DD-PT2.5/4P 50	DD-ST4-DP 50
Comb Link (邊接式聯接件)			
Marking Tags (標記號)	DUC-TMF5 10 DUC-TM5 10	DUC-TMF5 10 DUC-TM5 10	DUC-TMF6 10 DUC-TM6 10
Tool (工具)	DS3	DS3	DS3

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

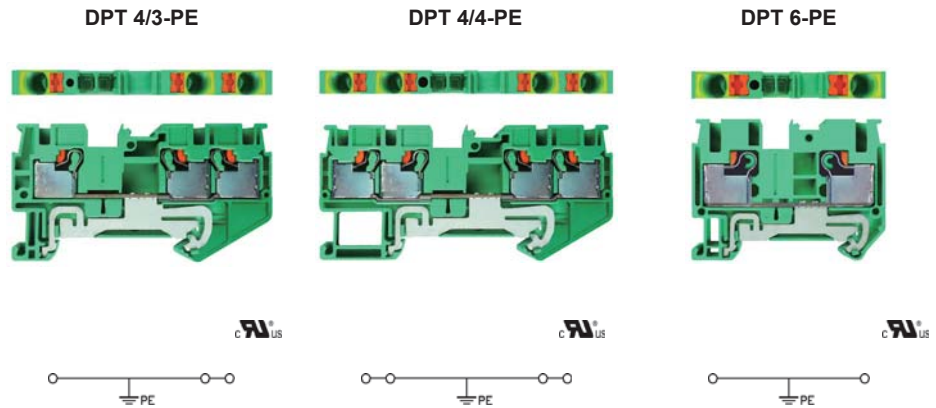


Specifications (產品規格)	4mm ²	4mm ²	6mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	AWG 24-10	AWG 24-10	AWG 20-8
CSA	AWG 24-10	AWG 24-10	AWG 20-8
IEC	0.2-6mm ²	0.2-6mm ²	0.5-6mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	10mm	10mm	12mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	6.2 x 66.5 x 36.5	6.2 x 77 x 36.5	8.2 x 57.7 x 43.5
For TS35x7.5	6.2 x 66.4 x 44	6.2 x 77 x 44	8.2 x 57.7 x 51
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT4/3P 50	DD-PT4/4P 50	DD-PT6P 50
Comb Link (邊接式聯接件)			
Marking Tags (標記號)	DUC-TMF6 10 DUC-TM6 10	DUC-TMF6 10 DUC-TM6 10	DUC-TMF8 10 DUC-TM8 10
Tool (工具)	DS3	DS3	DS4

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

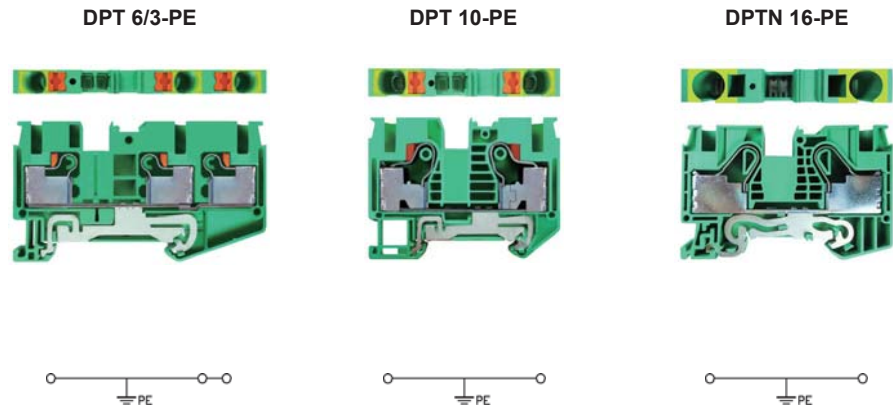

Specifications (產品規格)	6mm ²	10mm ²	16mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	AWG 20-8	AWG 20-6	AWG 20-4
CSA	AWG 20-8	AWG 20-6	AWG 20-4
IEC	0.5-10mm ²	0.2-10mm ²	0.5-16mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	12mm	18mm	18mm
Material / Available Color (材質顏色)			
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	8.2 x 74.2 x 43.5	10.2 x 67.7 x 50.5	12.2 x 77.6 x 51.5
For TS35x7.5	8.2 x 74.2 x 51	10.2 x 67.7 x 58	12.2 x 77.6 x 59
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT6/3P 50	DD-PT10P 50	DD-PT16P 50
Comb Link (邊接式聯接件)			
Marking Tags (標記號)	DUC-TMF8 10 DUC-TM8 10	DUC-TMF10 10 DUC-TM10 10	DUC-TMF12 10 DUC-TM12 10
Tool (工具)	DS4	DS5	DS5

Push In Spring Clamp Ground Terminal Blocks 推入式彈片接地型接線座

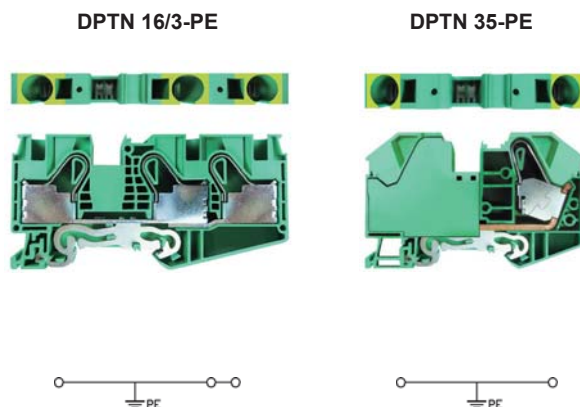

Specifications (產品規格)	16mm ²	35mm ²
Technical Data (技術參數)	Rated voltage / Rated current / Wire Size	Rated voltage / Rated current / Wire Size
UL	AWG 20-4	AWG 14-2
CSA	AWG 20-4	AWG 14-2
IEC	0.5-25mm ²	2.5-35mm ²
Insulating Impulse voltage withstand / Pollution degree (額定衝擊電壓 / 汙染等級)	8KV / 3	8KV / 3
Insulation stripping length (mm) (撥線長度)	18mm	25mm
Material / Available Color (材質顏色)		
Rail Dimensions (導軌尺寸)	T / W / H (mm)	T / W / H (mm)
For TS35x7.5	12.2 x 104 x 51.5	16 x 100 x 63.2
For TS35x7.5	12.2 x 104 x 59	16 x 100 x 70.7
Accessories (附件)	Cat. No. Qty.	Cat. No. Qty.
End Bracket (終端擋板)	SEW35 50	SEW35 50
End Plate (擋板)	DD-PT16/3P 50	
Comb Link (連接式聯接件)		
Marking Tags (標記號)	DUC-TMF12 10 DUC-TM12 10	DUC-TMF16 10 DUC-TM16 10
Tool (工具)	DS5	DS5